

Opening Roof Care & Maintenance

As with any quality building product, regular maintenance should eliminate any problems and/or the need for repairs or professional maintenance and advice for many years to come.


Just follow this easy maintenance guide and we know you will enjoy the benefits of your outdoor area.

Simple Maintenance Guide: Caring for your new roofing system

- 1. Hose Down** - A regular hose down once a month or so will keep your new roof looking like new. With one quick spray, you will remove most of the dirt created by dust or rain residue. Special attention should be directed at the areas that miss the rain, like eaves and under awnings or verandahs. We do not recommend using a high-pressure hose on your roof; a normal garden hose is sufficient.
- 2. Wash Away** – You can wash away stubborn grime with a soft brush or sponge soaked in warm water or detergent. Use regular dishwashing liquid, one teaspoon in four litres of water. To be extra effective you should change the water frequently and wipe over a second time with a clean towel to remove any smears. Best results occur when washing is undertaken in the shade.
Clean oxidization or dirt from any anodized sections by wiping over with a solution of methylated spirits and water. Heavy stains not removed with water and detergent should be treated with mineral turpentine and wiped dry with a clean cloth.
- 3. Cooking Areas** – If you have an outdoor kitchen located underneath your opening roof, be aware that smoke and grease stains can build up. These areas should be cleaned regularly to ensure your outdoor space is always shining. You should also be mindful of heat generated from BBQs, outdoor ovens and patio heaters. Always ensure good ventilation and airflow where possible.
- 4. Remove Mould** – Areas constantly damp (for instance, on walls behind shrubbery on the south side of your house) could suffer from the formation of mould. You can remove the mould with a solution of household bleach and water, at a ratio of 3:1. Rub the solution onto the surface with a soft sponge, leave for 10-20 minutes, and then rinse off with clean water. When dry, you should rinse once more with clean water to remove bleach residue.
- 5. Clean Gutters and Downpipes** – Your new roof gutters should be kept free of leaves and dirt build up or any other obstruction that may impede the flow of water. Any plants located near the roof should be trimmed regularly, particularly vines and climbing plants.
- 6. Lubricate Pivot Pins** – Under normal conditions your roof will benefit from a spray of ‘Lanox’ every 12 months. In high salt or dust area this should be carried out every 3 months. For the most effect, ensure you spray towards the pivot pin, which is on the inside of the louvre. We also recommend regularly opening and closing your roof for best results.
- 7. Roof Maintenance Access** - If you need to climb onto your Opening Roof walk on a plank at least 50mm thick, spanning between supporting perimeter beams.
- 8. Operation** – It is recommended to keep your Opening Roof in good working order you must operate the roof at least 2 times a week.

Remote Instructions

1. **Up** – Opens the roof
2. **Stop** – Stops movement
3. **Down** – Closes the roof
4. **% Button** (Partial Opening)
 - Press once → 25% open
 - Press twice → 50% open
 - Press three times → 75% open
 - Press four times → 100% open
5. The **channel button** at the bottom of the remote control scrolls through the channel LEDs at the top of the remote control.
 - If you have only one bay, you will only use the first channel.

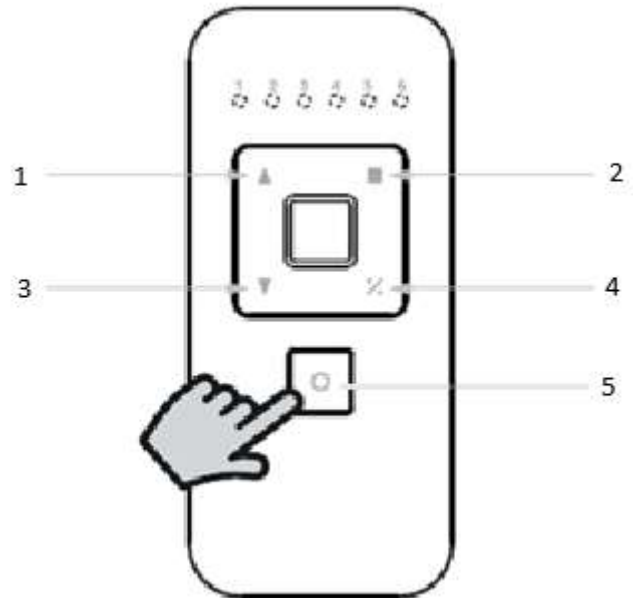

OneSmart App

Connecting the ONE SMART App

Control your roof from your phone and set automations.

Make sure you have:

- A 2.4GHz Wi-Fi network
- Wi-Fi name & password
- Bluetooth turned ON
- The OneSmart app is installed



Sharing Access

- Use the same login on multiple devices
- After pairing the devices for the first time with the first phone, to use the system from other phones, simply download the OneSmart app and log in with the same credentials.


Step-by-Step Setup

1. Create an Account

- Download **OneSmart app**
- Sign up using your email
- Verify your account

2. Add Your Device

- Open the app
- Tap “+” → **Add Device**
- Ensure Bluetooth is ON
- Tap “**Add**” when your device appears

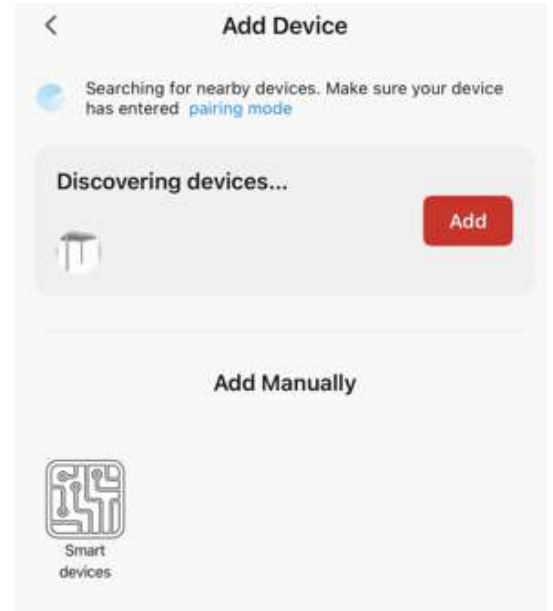


3. Put the Roof into Pairing Mode

Using your remote:

- Select the correct channel by pressing **channel button**
- Press and hold **Stop** and **% buttons** together
- LEDs will flash → system is now discoverable

⚠ You have **3 minutes** to connect before it resets.

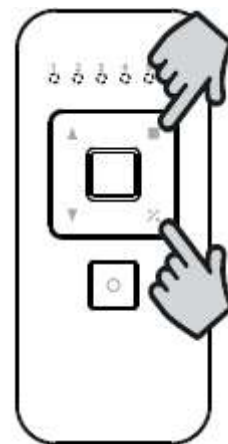

Alluva Opening Roof Systems
3/1 Reaghs Farm Road
Minto NSW 2566
T 02 8708 1510

sales@alluva.com.au
www.allvua.com.au

ABN 31 003 360 503
Builders License No. R89937




4. Connect to WiFi

- Select your WiFi network
- Enter your password
- Wait for setup to complete


5. Device Added

- Your roof will now appear on the home screen
- You can control:
 - Open / Stop / Close
 - Exact slat position

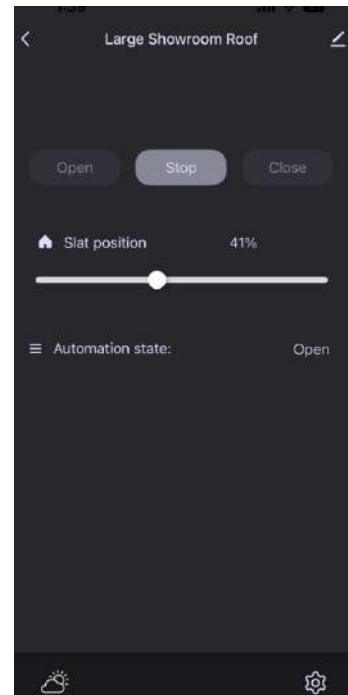



Weather & Sensors

- Access via weather icon
- Turn sensors on/off (e.g. rain sensor)
- You can disable rain sensor temporarily if needed

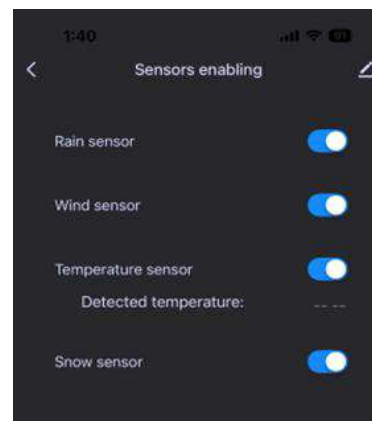

Settings

- Tap the **cog icon**
- Change the password or press Ok, and the password will stay 0000
- Adjust settings

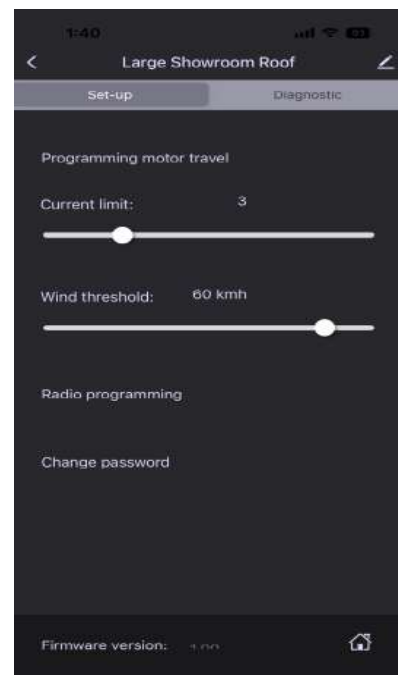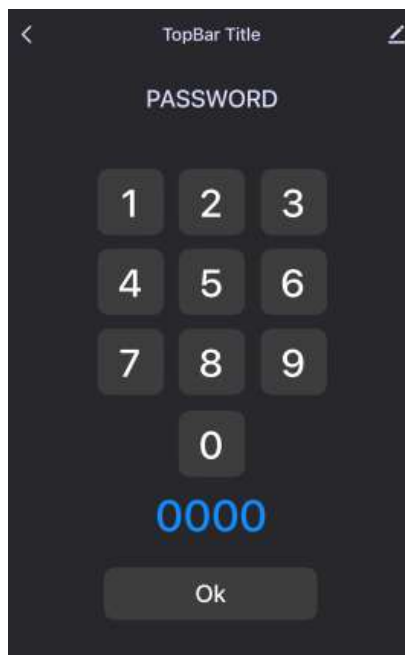

Automation (Scenes & Schedules)

Create a Scene



- Tap “+” → **Create Scene**

Options

- **Weather Trigger**
 - e.g. close roof when raining
- **Tap-to-Run**
 - One-touch actions (e.g. roof 50% + lights on)

Schedule

- Set daily/weekly times
- Example: Open in morning /Close at midday

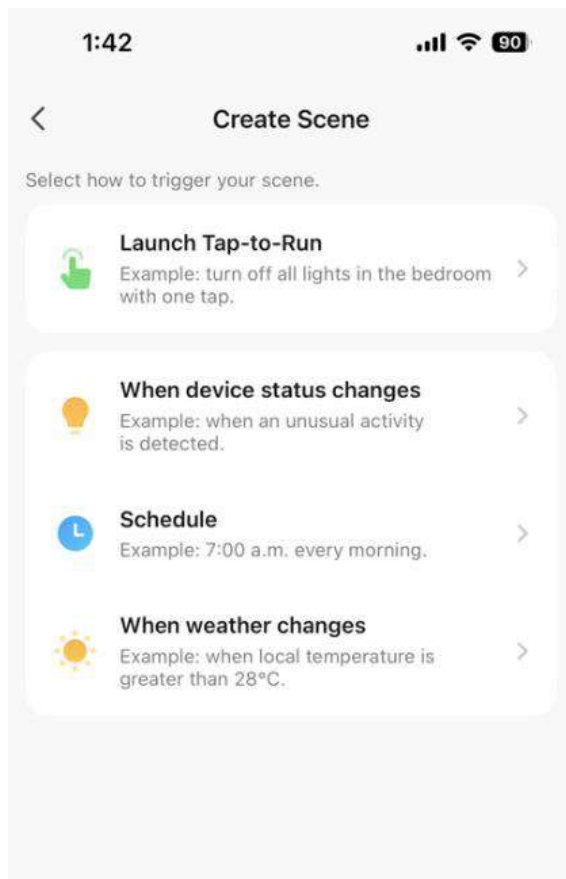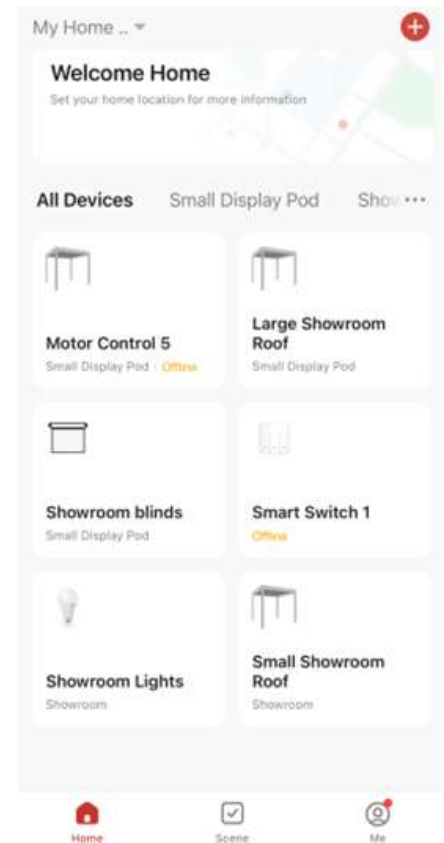

Sharing Access

- Use the same login on multiple devices
- Or create a shared email for household access

Need Help?

If something isn't working, contact your installer or support team.

admin@alluva.com.au

02 8708 1510